




ARMY PUBLIC SCHOOL AKHNOOR
(J & K)-181201
SCHOOL CODE-23515&
CBSE AFFILIATION NO - 730017

1862/APS/Quotation

30 Nov 2022


**CALL FOR QUOTATION: CONSTRUCTION OF NEW
BASKETBALL COURT AT APS AKHNOOR**


1. Quotations are invited for construction of new basketball court at Army Public School, Akhnoor. The specifications for the construction of new basketball court are attached as **Appx A**.
2. The two bids system will be applicable i.e Technical Bid & Commercial Bid. Only those vendors who qualify in technical bid are eligible for commercial bid. The two envelop cover separately written as Technical Bid & Commercial Bid will be dropped by the Vendor.
3. **Eligibility Criteria**
Technical Bid: - The following documents will be submitted with Technical Bid.
 - (a) Vendors having proper GST Number & only authorize dealer may submit their bids.
 - (b) Last three years IT returns should be attached.
 - (c) PAN Card Copy should be attached.
 - (d) Experience Certificate should include details & photographs of work of similar nature if executed / GeM Supply Order (in the form of Experience Cert) should be attached.
 - (e) Latest month GST return should be attached.**Commercial Bid:** -
 - (a) Total Cost.
 - (b) Discount.
 - (c) GST, freight and any other charges.
 - (d) Warranty / Guarantee
 - (e) Maintenance and Repair
4. Earnest Money in form of Demand Draft for @5% of total cost will be required to be deposited by the selected bidder as security of bid.
5. You are requested to send your quotations by 15 Dec 2022 positively dully addressed in a sealed envelope. Quotation will be dropped in to the Box kept in the APS Akhnoor upto 15 Dec 2022 (1500 hours). In case of quotations send by post, no quotation beyond the stipulated time frame shall accepted. Bids not in conformity with the quoted specification will be rejected.


(Geeta Devi)
Principal

Technical Details

CONSTRUCTION OF OUTDOOR BASKET BALL COURT AT APS- AKHNOOR

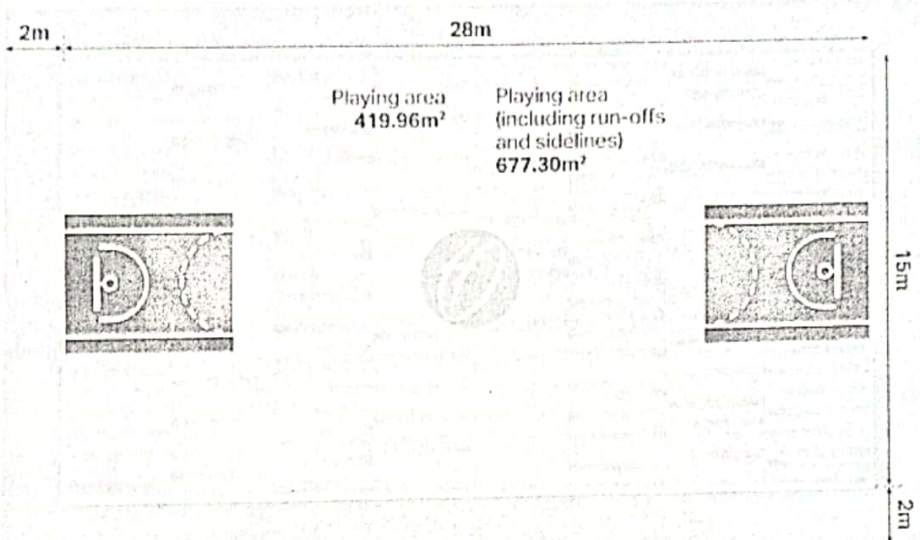S/No.	Brief Specification	Remark
1.	<p>Scope of Work: - Construction of Outdoor Basket Ball Court with accessories as per ITF Approved Slandered.</p> 	
2.	<p>Salient features of work:</p> <ul style="list-style-type: none"> a) Excavation:- Earth work in surface excavation not exceeding 30 cm in depth on given plan including getting out and disposal of excavated earth and nearest dump ground as directed by Engineer-in- Charge: All kinds of soil. b) Diluting and injecting chemical emulsion for POST-CONSTRUCTIONAL Treatment of soil under existing floors using chemical emulsion @ one litre per hole, 300 mm apart including drilling 12 mm diameter holes and plugging with cement mortar 1 :2 (1 cement : 2 Coarse sand) to match the existing floor with Chlorpyriphos/Lindane E.C. 20% with 1% concentration c) Concrete Work: Supplying, filling and spreading of gravel with required level including consolidation watering etc complete all as directed by Engineer in charge (Thickness approx 100 mm) 	



- d) Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering 1:5:10 (1 cement : 5 fine sand : 10 graded stone aggregate 40 mm nominal size) smooth finish and maintaining the slope. **(Thickness approx 100 mm)**
- e) Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering 1:1½:3 (1 Cement: 1½ coarse sand (zone-III): 3 graded stone aggregate 10 mm nominal size) and a top layer 6 mm thick cement plaster 1:3 (1 cement : 3 coarse sand) with smooth finishing on top surface. **(Thickness approx 75 mm)**
- f) Providing and fixing glass strips in joints of terrazo/ cement concrete floors. 40 mm wide and 4 mm thick (panel size 2x2 m)
- g) Brick edging 23cm wide 30 cm deep to concrete edge protection with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 including grouting and plaster with cement mortar 1:4 (1 cement : 4 fine sand).

- h) Making Line of Basket ball Court with Synthetic enamel paint or epoxy paint as per International Standards
- j) After completion of work, the site will be cleared by contractor and disposal of mulba/ rubbish to the nearest dumping ground, all complete as per direction of Charge.

